

# Bolon Project System – Instruction

## Product description:

Bolon Project Sealer creates a dirt-resistant, long lasting surface. For normal maintenance, one treatment is sufficient. Areas with extreme traffic/wear may require repeated treatment over time.

## Application area:

Specially developed for use on **Bolon Flooring**. Bolon IS NOT RESPONSIBLE if this product is used on other materials than Bolon.

## Directions for use:

Preferable treat the floor directly after installation is finished. If the floor is dirty, clean the floor thoroughly and let the floor dry, see Bolon Maintenance Instruction. The application should be performed at ambient temperature. Shake container before use.

Pour BPS onto the floor and spread an even layer of BPS using the specially developed roller and tools for BPS. This roller gives an even layer of BPS on the flooring.

Do not walk on the floor for 1-2 hours after treatment. The time may vary due to temperature and humidity.  
Clean tools with water.


Heavy furniture should not be place on treated surfaces within 24 hours after treatment

The roller could be cleaned with water.

## Consumption:

One 4 liter container will treat approx. 60-80 m<sup>2</sup>.

One 1,06 gallon container will treat approx. 650-850 sq ft.

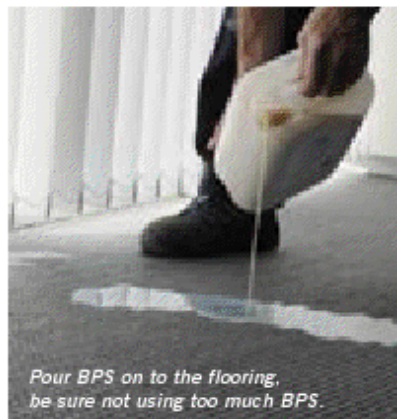

## Technical information:

- Package is containing 5 liter (1.32 gallon)
- Spec. gravity: 1.04
- Dry content: 33%
- Shelf-life: 2 years
- Protect from frost degrees.

## Bolon application tools:

- Article BPS91 Bolon roller. This 45 cm wide roller gives an even layer of the BPS onto the flooring. It is specially developed for the BPS and Bolon floor covering.
- Article BPS92 Bolon holder for the roller. This is needed for the roller, equipped with bayonet mount for the shaft.
- Article BPS93 Bolon aluminum telescopic shaft. The shaft has a bayonet mount for the holder. The shaft is adjustable in length for an ergonomic work.

